

Item # \_\_\_\_

C.S.I. Section 11420

GRIDDLES & CHARBROILERS

# AHP SERIES COUNTER MODEL ACHIEVER HOTPLATE



Model AHP424U



# □ AHP212U 12" wide □ AHP424U 24" wide □ AHP636U 36" wide

□ AHP848U 48" wide

## STANDARD FEATURES

- Stainless steel sides and control panel.
- Full width pull out crumb tray.
- Heavy duty cast iron top grates.
- 30,000 BTU/hr. open burners with lift-off heads.
- Standing pilot ignition system.
- One infinite heat control valve for each burner.
- 4" adjustable legs.
- <sup>3</sup>/<sub>4</sub>" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

# **OPTIONAL FEATURES**

- □ Cutting board.
- Condiment rail.
- Plate rail.
- □ Stainless steel stand with undershelf and casters.

## SPECIFICATIONS

#### **Exterior Dimensions:**

\_\_\_\_"wide x 33" deep x  $12^{3}\!/_{8}$  " working height on 4" adjustable legs.

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS WHEN ORDERING. SPECIFY ALTITUDE WHEN ABOVE 3,999 FT.



P.O. Box 696 
Louisville, KY 40201 
Toll-free: 1-800-814-2028 
Local: 502-778-2791 
Quote & Order Fax: 1-800-444-0602



# GRIDDLES & CHARBROILERS

# AHP SERIES COUNTER MODEL ACHIEVER HOTPLATE

#### INSTALLATION INSTRUCTIONS


- 1. A gas pressure regulator sized for this unit is included. Natural Gas 5.0" W.C. Propane Gas 10.0" W.C.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quicy, MA 02169, www.NFPA.org. When writing refer to NFPA No. 96.
- 3. These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association Accredited Standards Committee Z223, @ 400 N. Capital St. NW,

Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park Quincy, MA 02169-7471.

## NOTE: In the Commonwealth of Massachusetts

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

- 4. Equipment clearance: Combustible Non-Combustible Rear 6" 0" Sides 6" 0"
- 5. This appliance is intended for commercial installation only and is not intended for home use.

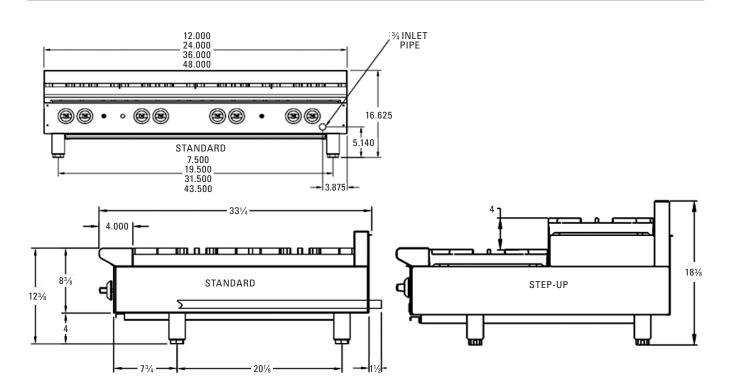

MODEL	WIDTH	DEPTH	OVERALL HEIGHT	WORKING HEIGHT*	NO. OF BURNERS	TOTAL BTU/HR.	APPROX SHIP WT. (LB/KG)
AHP212U	12"	- 33"	165⁄8"	123⁄8"	2	60,000	95 lbs./43 kg
AHP424U	24"				4	120,000	165 lbs./74 kg
AHP636U	36"				6	180,000	265 lbs./119 kg
AHP848U	48"				8	240,000	310 lbs./140 kg



P.O. Box 696 • Louisville, KY 40201 • Toll-free: 1-800-814-2028 • Local: 502-778-2791 • Quote & Order Fax: 1-800-444-0602